

PRODUCT DESCRIPTION

This push plate is designed to fit neatly into standard single- or double-gang electrical boxes. The faceplates are made of 1/16" thick stainless steel for durable use. The push plate may be hard wired to the door operator or connected to one of Stanley's-PHI line of radio-controlled transmitters.

SAFETY PRECAUTIONS




- Shut off all power going to the header before attempting any wiring procedures.
- Maintain a clean & safe environment when working in public areas.
- Constantly be aware of pedestrian traffic around the door area.
- Always stop pedestrian traffic through the doorway when performing tests that may result in unexpected reactions by the door.
- Always check placement of all wiring before powering up to insure that moving door parts will not catch any wires and cause damage to equipment.
- Ensure compliance with all applicable safety standards (example: ANSI A156.19) upon completion of installation.


INSTALLATION

1. Remove the two Phillips head screws from the faceplate of the push plate.
2. Wire the switches of the push plates to the door controllers or radio-controlled transmitters using the NC contacts and common.
3. Fasten the disassembled push plate to the single- or double-gang electrical box (by others) using the enclosed #6 screws.
4. Reattach the faceplate to the mounted back plate assembly.
5. Test the push plate for proper activation.

1-GANG

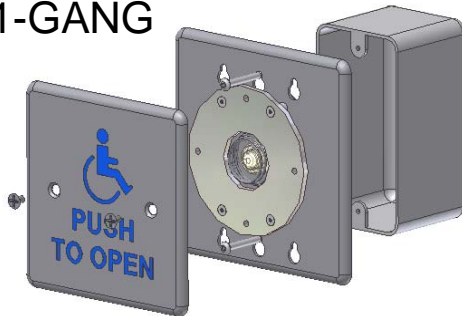

2-GANG

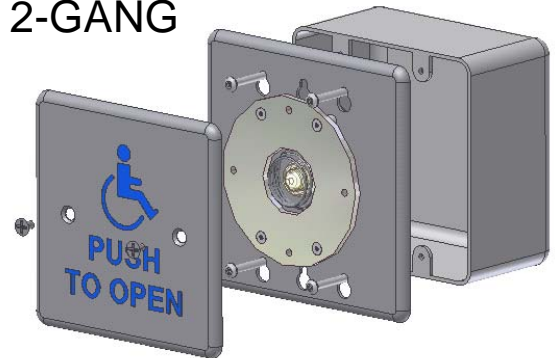

CLEANING

The push plates are constructed with durable stainless steel and painted with scuff-resistant coatings. To clean the plates, use only a damp, non-abrasive cloth. Repeated cleaning with harsh solvents or abrasive materials may cause deterioration of the coating. Please make the end-user aware of this procedure.

COMPANY CONTACT

If after troubleshooting a problem and a satisfactory solution cannot be achieved, please contact:

Stanley Security Solutions, Inc.
6161 E. 75th Street
Indianapolis, Indiana, 46250

www.stanleysecuritysolutions.com

NEVER sacrifice the safe operation of the automatic door or gate for an incomplete solution.