



HOLE DRILLING SCHEDULE		
DEVICE	HOLE "B"	HOLE "C"
1201, FL-1201	NO	NO
1202, FL-1202	NO	NO
1203, FL-1203	YES	NO
1205, FL-1205	YES	YES
1208, FL-1208	YES	YES
1205A, FL-1205A	NO	YES
1208A, FL-1208A	NO	YES



IF TRIM IS SPECIFIED
SEE TRIM TEMPLATE
BEFORE DRILLING
HOLES A, B, & C

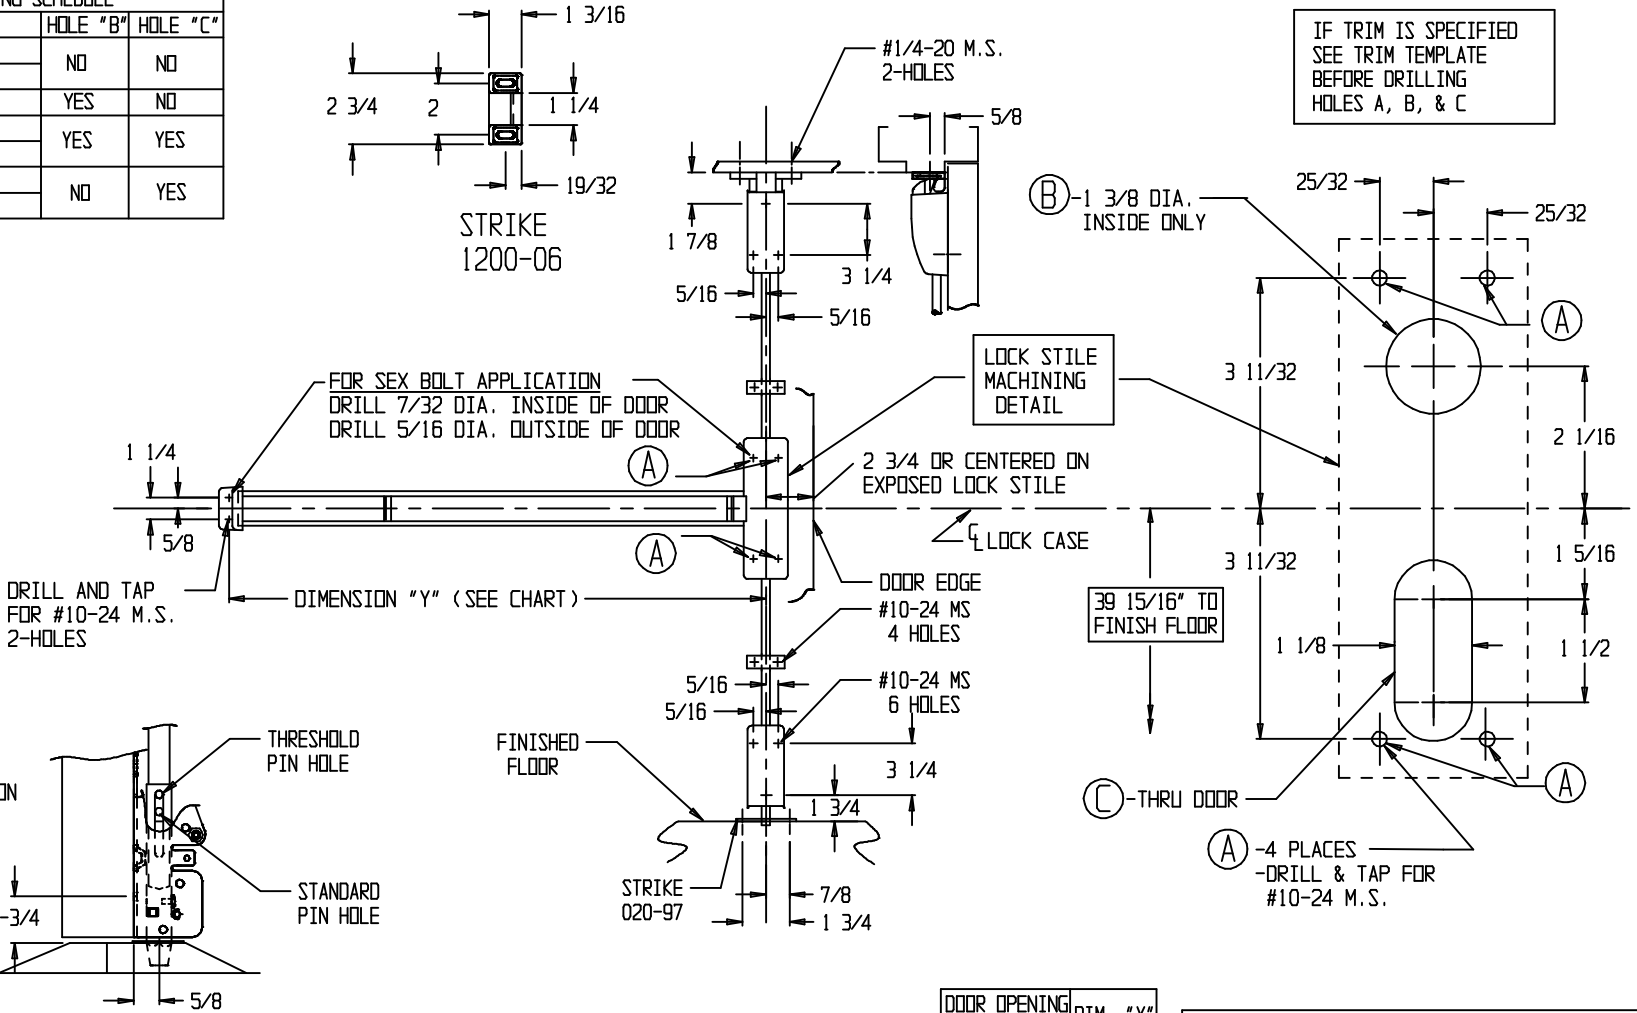

FL-1200 FIRE EXIT DEVICE INSTALLATION
 PROVIDE ADEQUATE REINFORCEMENT FOR METAL COVERED COMPOSITE AND HOLLOW METAL DOORS FOR THE DRILLING AND TAPPING FOR MACHINE SCREWS.
 PLASTIC AND WOOD COVERED COMPOSITE OR METAL COVERED COMPOSITE AND HOLLOW METAL FIRE DOORS WITHOUT REINFORCEMENT, SEX BOLTS ARE REQUIRED.

DEVICE ILLUSTRATED IS
RIGHT HAND REVERSE BEVEL
 FOR LEFT HAND REVERSE BEVEL,
REVERSE STILE MACHINING

DOOR OPENING WIDTH	DIM. "Y"
2' 6"	25"
2' 8"	27"
3' 0"	31"
3' 4"	35"
3' 6"	37"
3' 8"	39"
4' 0"	43"

PRECISION HARDWARE INC.
 P.O. BOX 74040
 ROMULUS MI. 48174-0040

DEVICE SERIES
1200, FL-1200

TEMPLATE NO. REV
HM-1200-F

RELEASE DATE
11-01-00