FL-1300 FIRE EXIT DEVICE INSTALLATION

PROVIDE ADEQUATE REINFORCEMENT FOR METAL COVERED COMPOSITE AND HOLLOW METAL DOORS FOR THE DRILLING AND TAPPING FOR MACHINE SCREWS.

PLASTIC AND WOOD COVERED COMPOSITE OR METAL COVERED COMPOSITE AND HOLLOW METAL FIRE DOORS WITHOUT REINFORCEMENT, SEX BOLTS ARE REQUIRED.

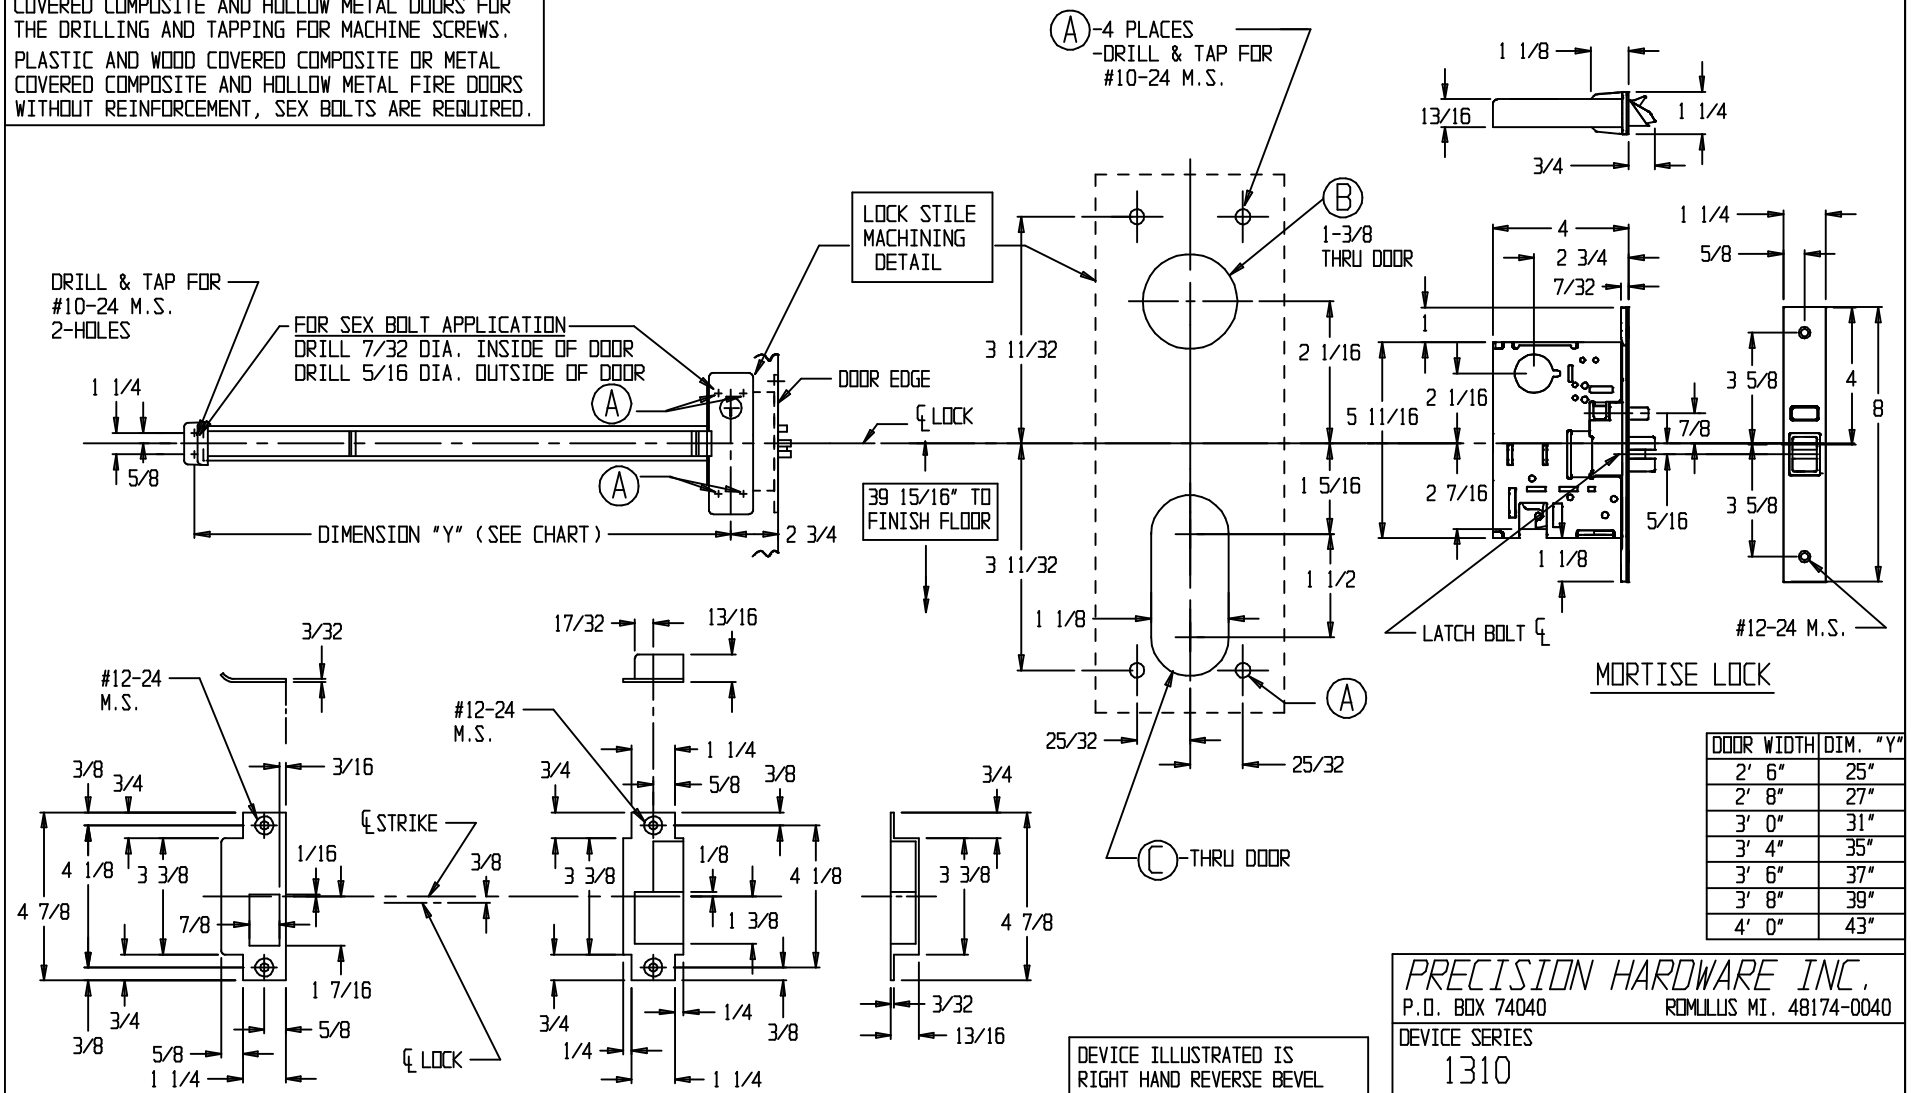

DOOR WIDTH	DIM. "Y"
2' 6"	25"
2' 8"	27"
3' 0"	31"
3' 4"	35"
3' 6"	37"
3' 8"	39"
4' 0"	43"

DEVICE ILLUSTRATED IS RIGHT HAND REVERSE BEVEL

FOR LEFT HAND REVERSE BEVEL, REVERSE STILE MACHINING

PRECISION HARDWARE INC.
P.O. BOX 74040 ROMULUS MI. 48174-0040

DEVICE SERIES 1310

TEMPLATE NO. REV HM-1310-A

RELEASE DATE 10-15-00